


LEED POINTS MR 5.1 AND MR 5.2

DIRECT LINEAR DISTANCE:
MONCURE MILL TO NORTH-EASTERN US CITIES



Setting
the standard

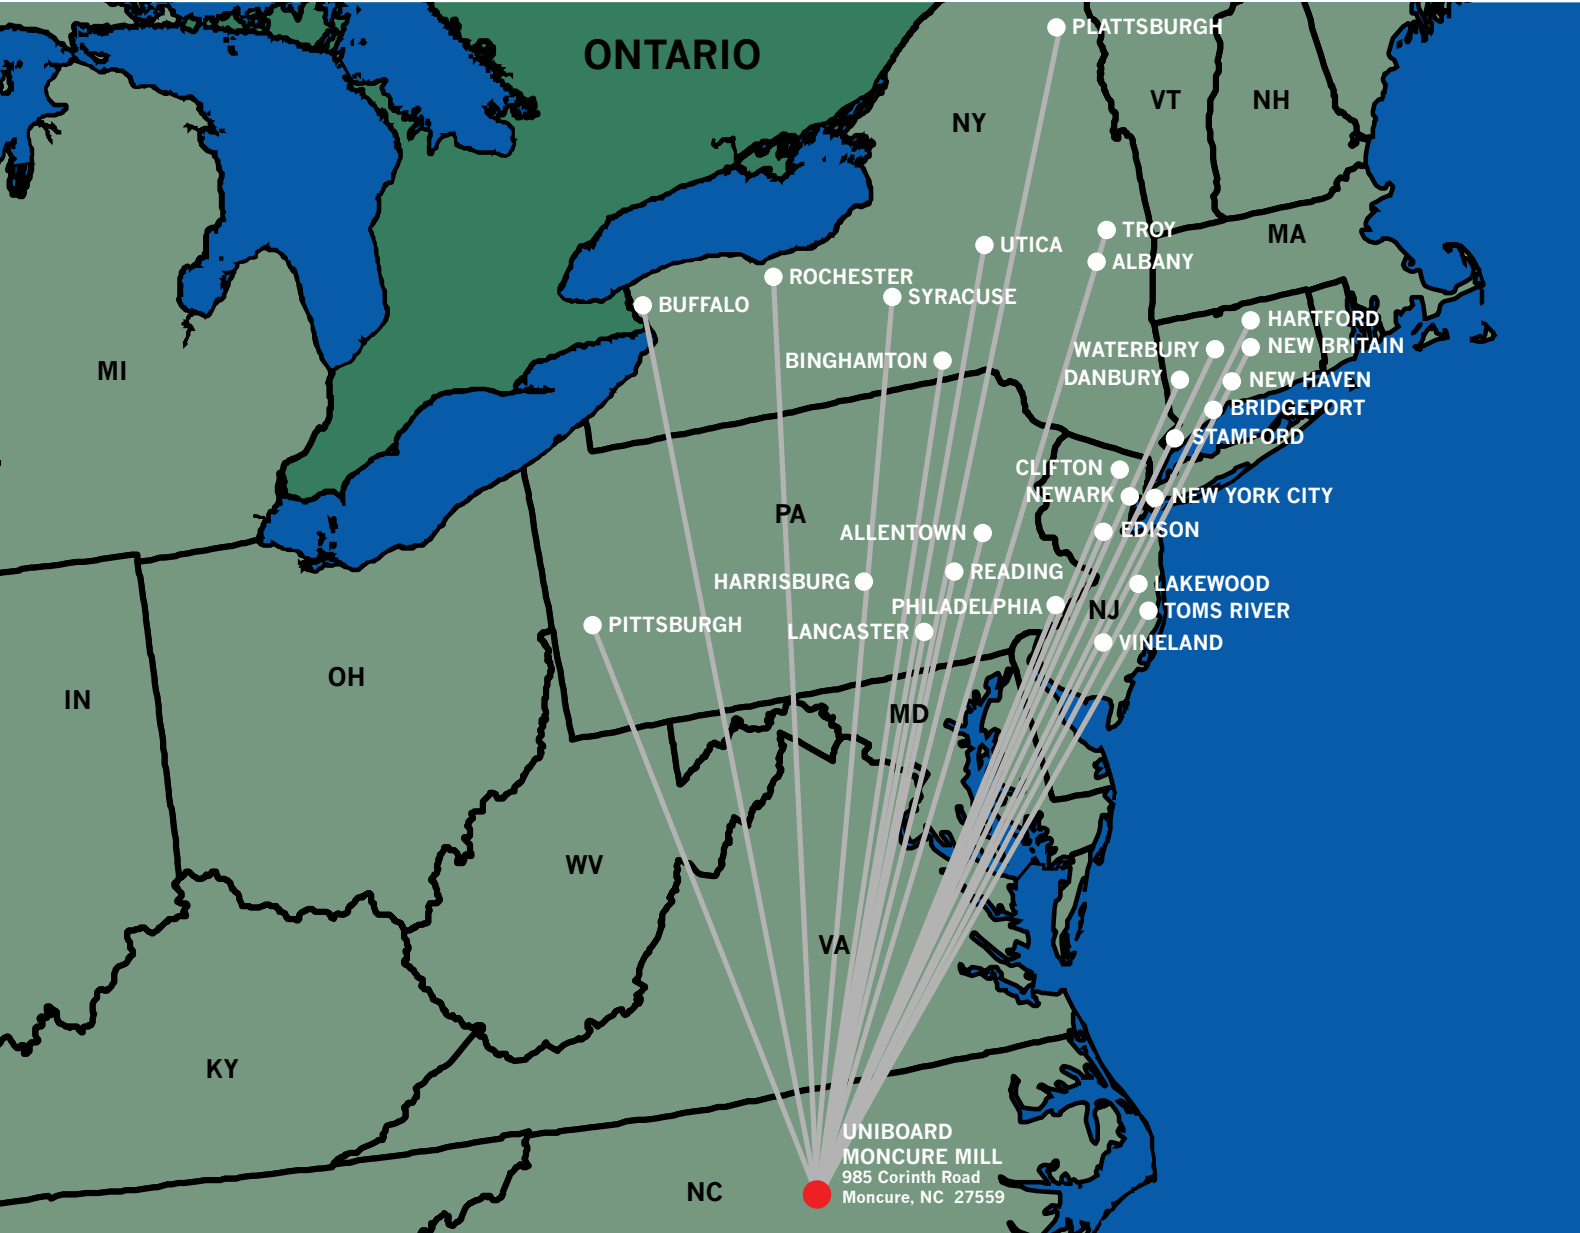

LEED POINTS MR 5.1 AND MR 5.2

DIRECT LINEAR DISTANCE: MONCURE MILL TO NORTH-EASTERN US CITIES



www.uniboard.com

A Pfeiderer AG company

STATES ENTIRELY WITHIN THE 500 MILE RADIUS

PENNSYLVANIA

Pittsburgh	337 mi.
Lancaster	340 mi.
Harrisburg	342 mi.
Philadelphia	367 mi.
Reading	368 mi.
Allentown	395 mi.

NEW JERSEY

Vineland	346 mi.
Toms River	400 mi.
Lakewood	406 mi.
Edison	422 mi.
Newark	441 mi.
Clifton	448 mi.

STATES WITH CITIES WITHIN THE 500 MILE RADIUS

NEW YORK

New York City	446 mi.
Binghamton	478 mi.
Buffalo	502 mi.
Rochester	526 mi.
Syracuse	536 mi.
Utica	555 mi.
Albany	562 mi.
Troy	569 mi.
Plattsburgh	692 mi.


CONNECTICUT

Stamford	479 mi.
Bridgeport	497 mi.
Danbury	500 mi.
New Haven	513 mi.
Waterbury	522 mi.
New Britain	537 mi.
Hartford	545 mi.

STATES ENTIRELY OUTSIDE THE 500 MILE RADIUS

MAINE
MASSACHUSETTS
NEW HAMPSHIRE

RHODE ISLAND
VERMONT

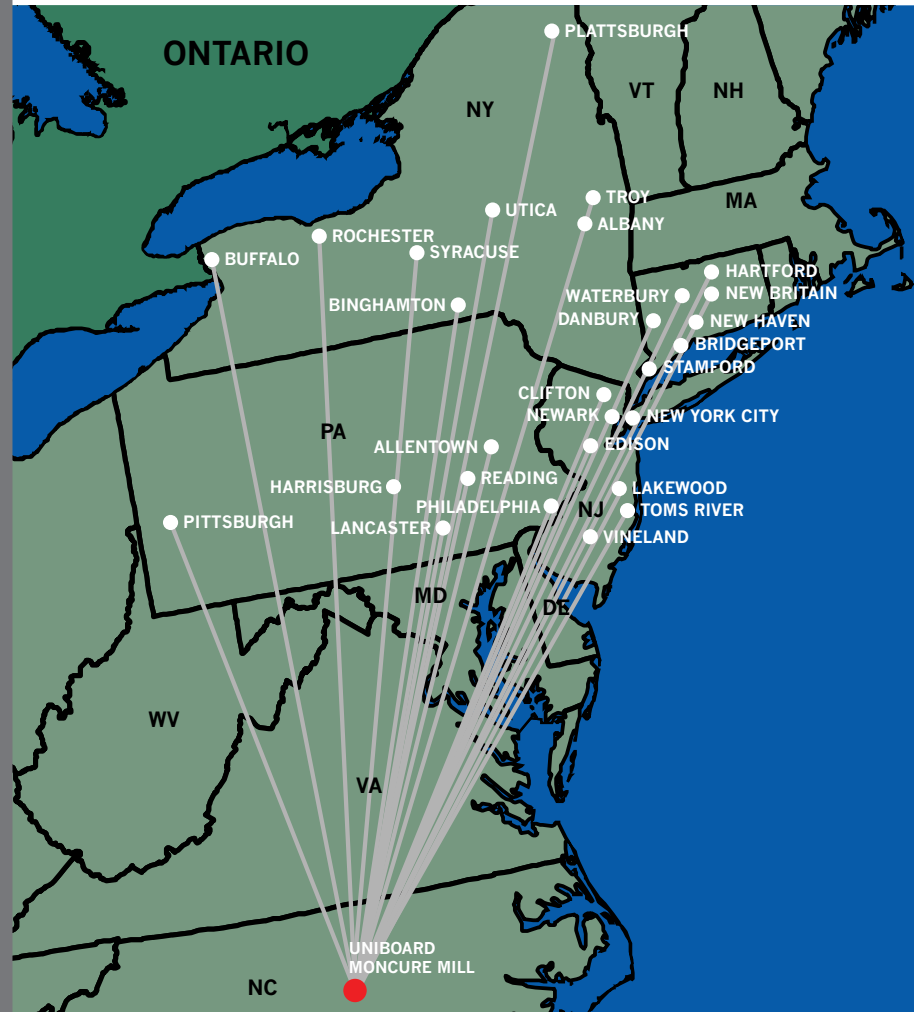

MR 5.1: Use at least 20% of materials manufactured within a 500 mile radius from job site.
MR 5.2: In addition to the requirements of MR 5.1, use at least 10% of materials extracted within a 500 mile radius from job site.