


LEED POINTS MR 5.1 AND MR 5.2

DIRECT LINEAR DISTANCE:  
MONCURE MILL TO MID-WESTERN US CITIES



Setting  
the standard

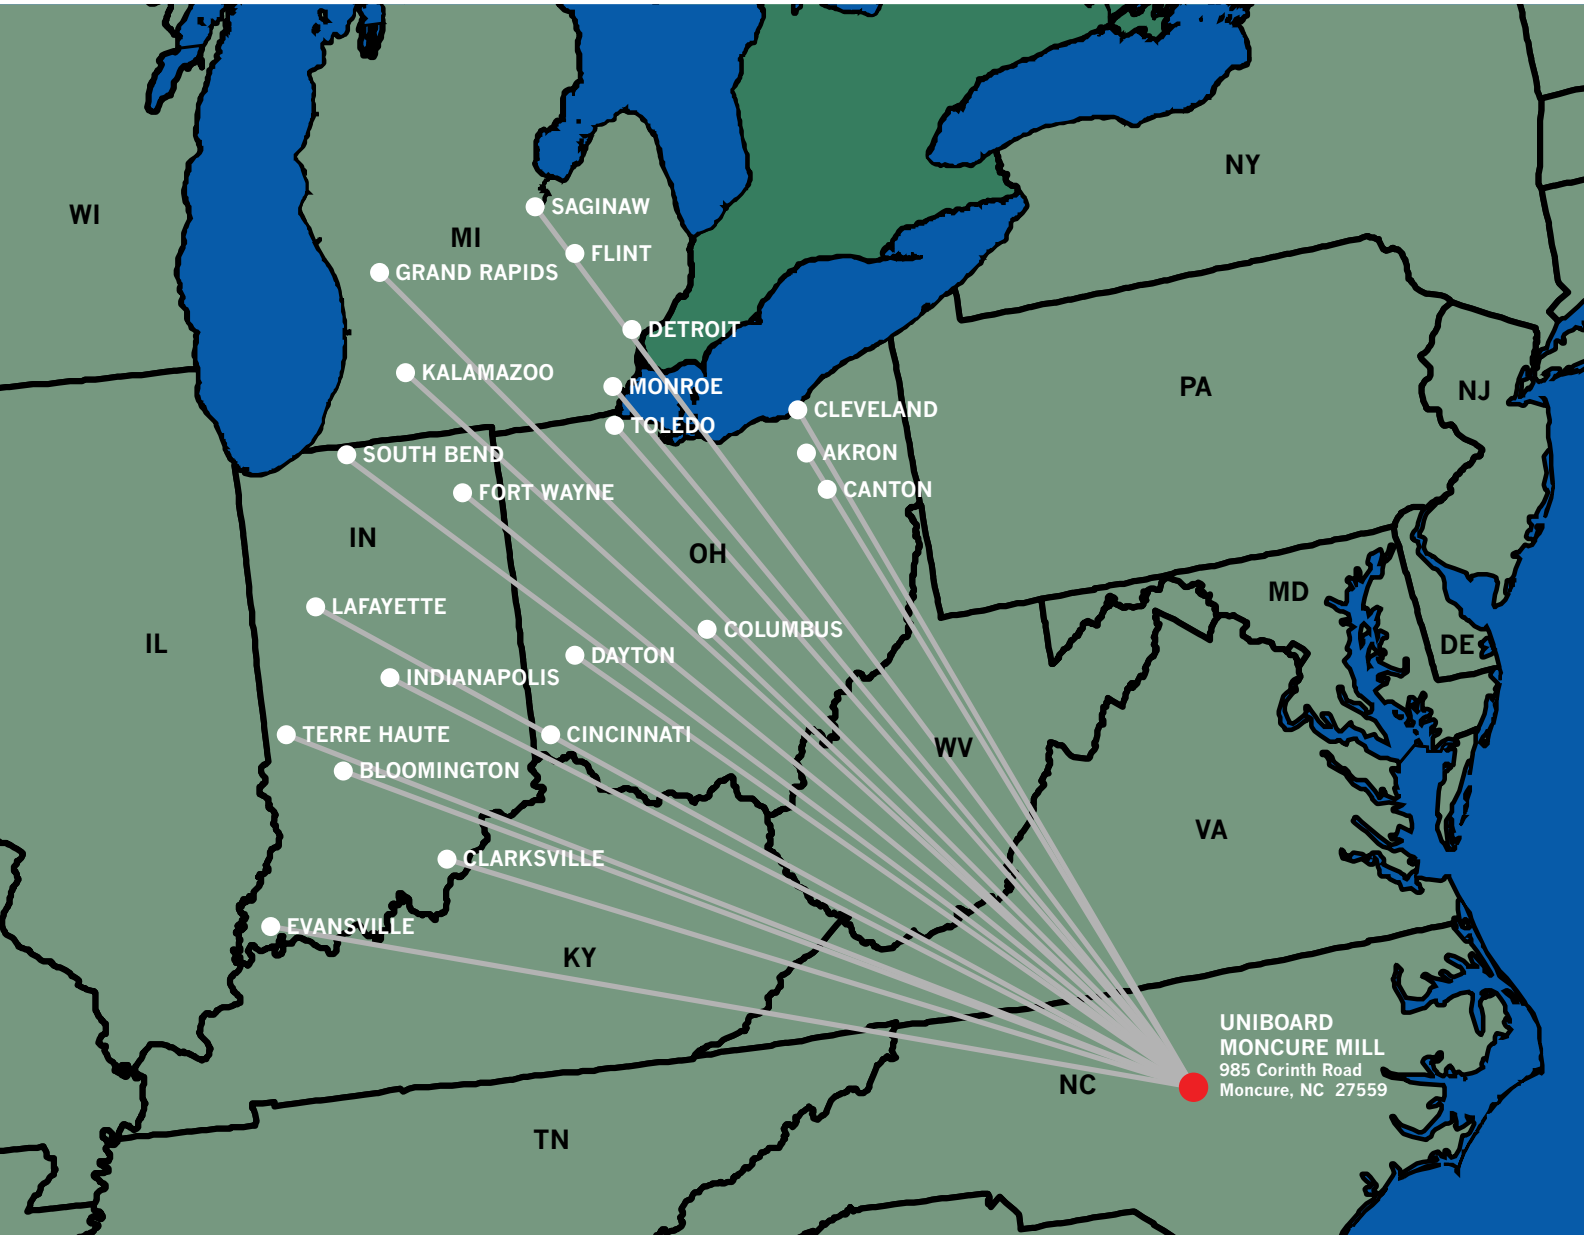

## LEED POINTS MR 5.1 AND MR 5.2

### DIRECT LINEAR DISTANCE: MONCURE MILL TO MID-WESTERN US CITIES



[www.uniboard.com](http://www.uniboard.com)

A Pfeiderer AG company

#### STATES WITH CITIES WITHIN THE 500 MILE RADIUS

##### OHIO

Columbus	370 mi.
Canton	379 mi.
Cincinnati	385 mi.
Akron	400 mi.
Dayton	401 mi.
Cleveland	430 mi.
Toledo	483 mi.

##### INDIANA

Clarksville	414 mi.
Bloomington	478 mi.
Indianapolis	483 mi.
Evansville	499 mi.
Fort Wayne	503 mi.
Terre Haute	530 mi.
Lafayette	540 mi.
South Bend	571 mi.


##### MICHIGAN

Monroe	494 mi.
Detroit	511 mi.
Flint	567 mi.
Kalamazoo	579 mi.
Saginaw	598 mi.
Grand Rapids	618 mi.

#### STATES ENTIRELY OUTSIDE THE 500 MILE RADIUS

ILLINOIS  
IOWA

MISSOURI  
WISCONSIN

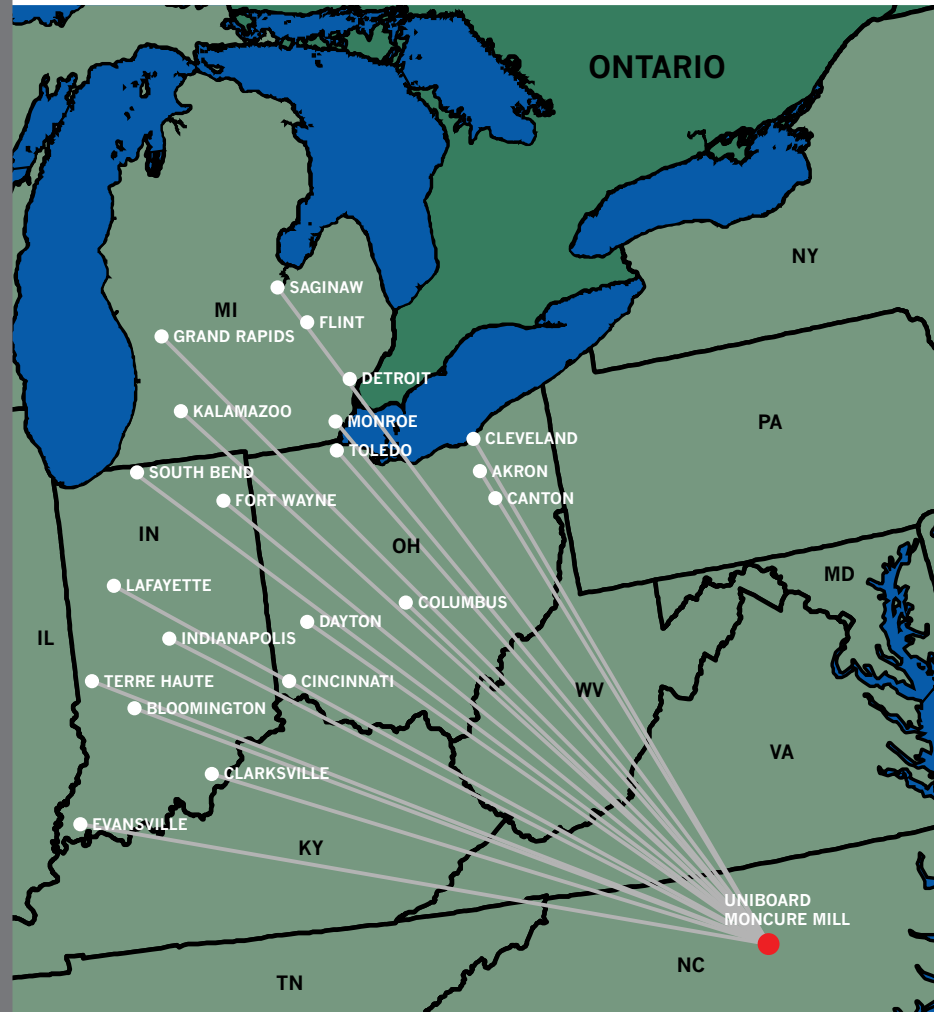

**MR 5.1:** Use at least 20% of materials manufactured within a 500 mile radius from job site.  
**MR 5.2:** In addition to the requirements of MR 5.1, use at least 10% of materials extracted within a 500 mile radius from job site.